




Y25Ls(s)d1-K

Baş kirişli Boji, 22,5 dingil basıncına sahip olan UIC ve TSI standartlarına uygun olarak üretilmektedir. 1435 mm hat genişliğine uygundur.




Bogie with headbeam has 22.5 axle pressure and is produced in accordance with UIC and TSI standards. It is suitable for 1435 mm line width.

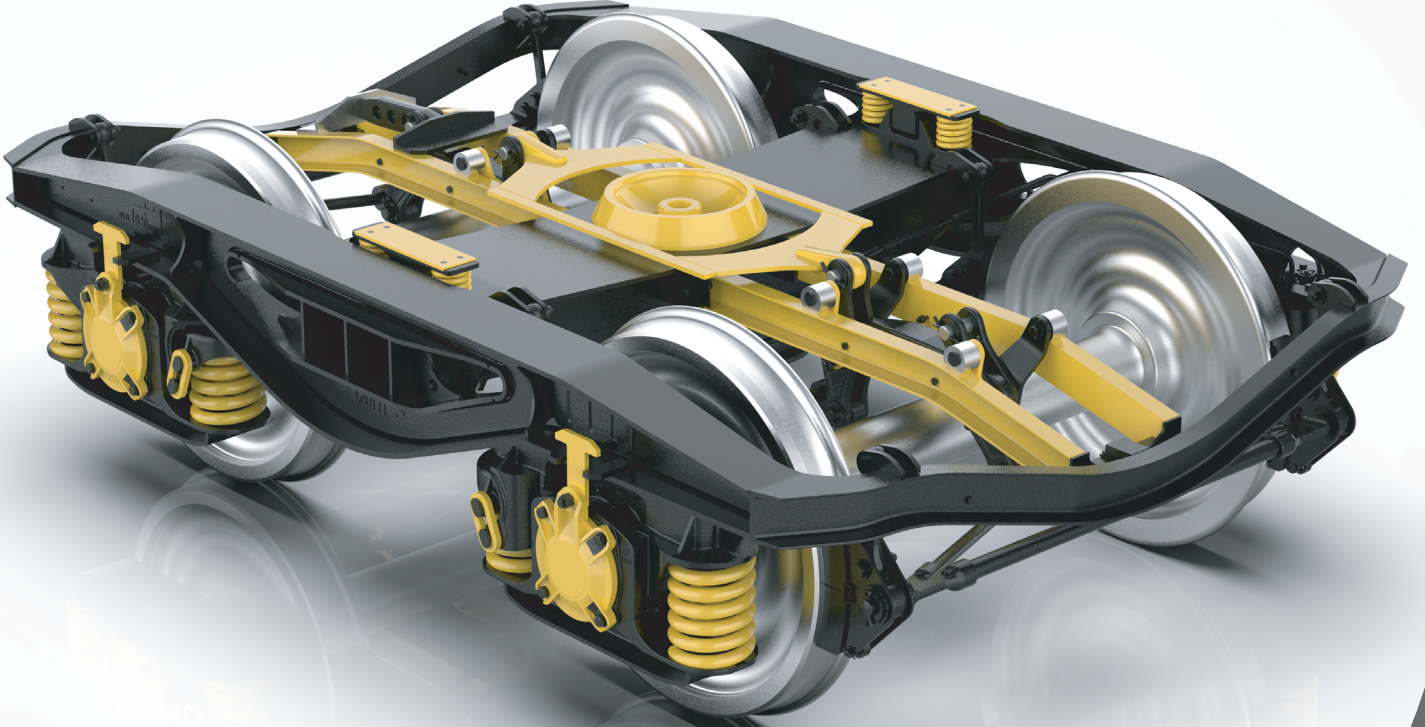

Teknik Özellikler / Technical Specifications

Boji tipi / Type standard design		Y25Ls(s)d1-K
Ağırlık / Weight (without top pivot part)		4.450 ±%2 (with wheelsets BA004)
Akslar arası mesafe / Wheelbase		1.800 mm
Teker çapı / Wheel diameter (max. and min.)		Ø920 mm – Ø840 mm
20-ton altındaki Pivot yüksekliği / Bogie center pivot height at wagon weight of 20-tons.		925 mm +3/-5
Ray açıklığı / Track gauge		1.435 mm
Aks yükü / Axle load		22,5 t
Maksimum genişlik / Maximum width		2.300 mm
Maksimum uzunluk / Maximum length (incl. wheelsets)		3250 mm
Aks kutusu yan boşluklar / Lateral clearance size of axle box – axle guard		2x10 mm
22,5 t Yükleme hızı / For wagons up to the speed max axle load 22,5 t (regarding running gear)		100 km/h
20 t Yükleme hızı / For wagons up to the speed max axle load 20t (regarding running gear)		120 km/h
Yaylanma esnekliği / Brake flexibility	Tare wagon	2,45 mm/t
	Laden wagon	0,93 mm/t
Ray eğimi / Rail inclination		1:40
Rulman / Axle roller with bearing		WJ/WJP 130x240
Clearance at the resilient side bearing		12 mm +2
Kayma plakası / Bogie pivot with liner		Yes
Kayma plakası / Suspended side bearers		Yes
Fren Sistemi / Type of brake		Classical brake system
Sabo / Brake block		2xBgu / Composite K Type

Y25Ls(s)d1-K

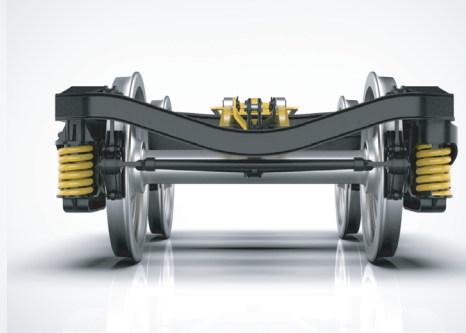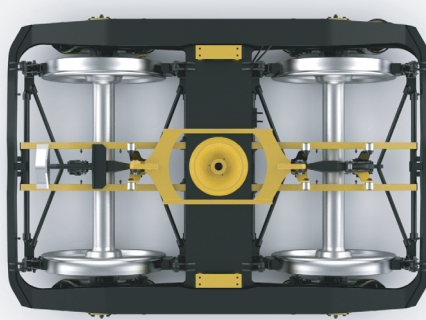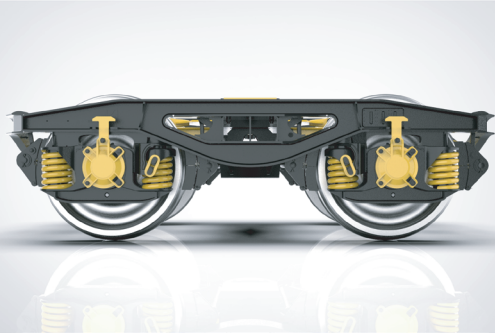

VAKO

VAGON & KONTEYNER

